



Transmit



Recieve




Decode



Control

## Receiver Module RR02 and RRM02 Baseline


The Receiver Module RRM02 is available for different frequency ranges. The received telegram is provided at the output as TTL-level. An additional interpretation device is necessary to decode the provided signal.

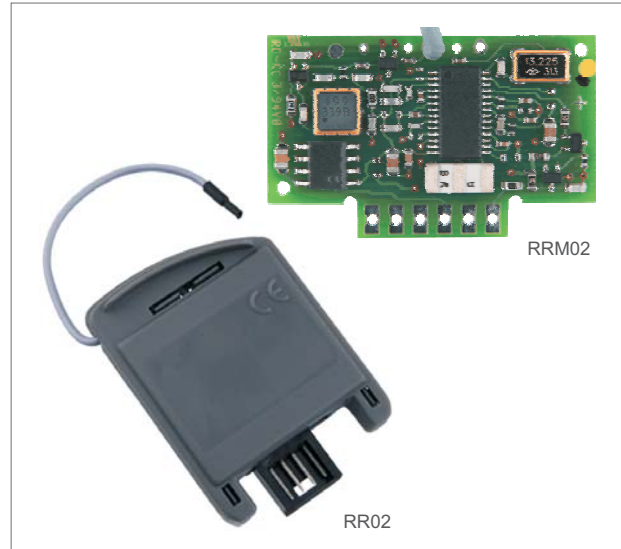


### Technical Details

Power Supply	see Models
Current Consumption	see Models
Output	TTL-level, serial
Degree of Protection	RR02: IP20
Operating Temperature	-20 °C to +60 °C
Dimensions	53 x 37 x 11 mm

### Connection Diagram



RRM02

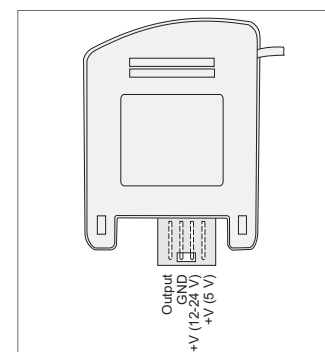

RR02

### Scope of Delivery

- Receiver Module
- Operating Manual

### Models

Product Key	Description	Power Supply	Current Consumption	Frequency
RR02-4101AS-01	Receiver Module (with housing)		approx. 13 mA	433,92 MHz
RRM02-4101AS-02	Receiver Module		approx. 10 mA	433,92 MHz
RRM02-4101AS-01	Receiver Module		approx. 13 mA	433,92 MHz
RR02-5001AS-01	Receiver Module (with housing)		approx. 13 mA	868,30 MHz
RRM02-5001AS-02	Receiver Module		approx. 10 mA	868,30 MHz
RRM02-5001AS-01	Receiver Module		approx. 13 mA	868,30 MHz