

# RT32 Hand transmitter

## UP/STOP/DOWN



The RT32 hand transmitter has been specially designed to control roller shutters, blinds and awnings.

The UP/STOP/DOWN operating mode can be used in combination with the appropriate Easywave receiver.

By using the group function, it is possible to control all connected radio receivers at the press of a single button.




RT32E5004-01-02K

RT32E5001-01-22K


### Technical specifications

Coding	Easywave
Frequency	868.30 MHz
Channels	1 or 4
Range	typically 150 m in good free-field conditions
Power supply	1x 3V-battery, CR2032
Operating indicator	LED(s)
Operation	transmission lasts as long as the button is pressed (maximum 36 seconds)
Operating temperature	-20 °C to +60 °C
Dimensions (W/L/H)	38/109/14 mm (without wall holder)
Weight	37 g (including battery)
Color	glossy white similar RAL 9003 glossy black similar RAL 9005

### Models

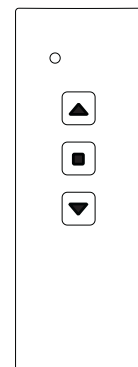

RT32E5001-01-xxK  
1x UP/STOP/DOWN

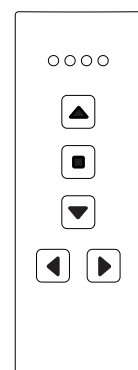

RT32E5004-01-xxK  
4x UP/STOP/DOWN

### Scope of delivery

- Hand transmitter incl. battery
- Wall holder
- Adhesive pad
- Operating manual

### Accessories (optional)

RT32-ACC-01-02P	Wall holder, glossy white
RT32-ACC-01-22P	Wall holder, glossy black



RT32-ACC-01-02P



RT32-ACC-01-22P

### Models

Product number	Description
RT32E5001-01-02K	Hand transmitter, Easywave, 1x UP/STOP/DOWN, glossy white
RT32E5001-01-22K	Hand transmitter, Easywave, 1x UP/STOP/DOWN, glossy black
RT32E5004-01-02K	Hand transmitter, Easywave, 4x UP/STOP/DOWN, group function, glossy white
RT32E5004-01-22K	Hand transmitter, Easywave, 4x UP/STOP/DOWN, group function, glossy black