

RCP02 Plug-in socket receiver PULSE

The RCP02 plug-in socket receiver receives transmission codes from programmed Easywave radio transmitters and retransmits a 1-second pulse to the connected device via the pulse output.

With the RCP02, it is therefore easy to retrofit or convert garage door motors, for example, by installing a radio interface.

The RCP02 also comes with a power outlet which is not switched and thus remains fully usable.




RCP02E5001B01-01K

Technical specifications


Coding	Easywave Up to 32 transmitters can be programmed.
Frequency	868.30 MHz
Channels	1
Power supply	230 V AC, 50 Hz
Power consumption	1.0 W standby
Operating mode	PULSE (1 second)
Outputs	1 potential-free relay contact country-specific plug system
Maximum contact load	pulse output: 1 A / 24 V DC mains voltage (not switchable): 10 A / 230 V AC
Operating temperature	-10 °C to +35 °C
Dimensions	50 x 120 x 75 mm
Color	white similar to RAL 9003

Plug system



Scope of delivery

- Plug-in socket receiver
- Cable (length 155 cm)
- Operating manual

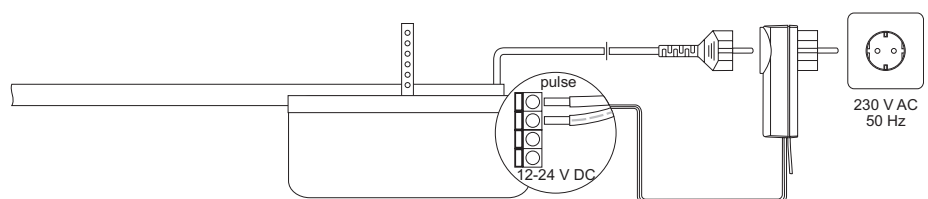

Wiring diagram

Models

Product numbers	Description	Plug system
RCP02E5001B01-01K	Plug-in socket receiver 1-channel, pulse, white	D/A/NL/S/N
RCP02E5001B02-01K	Plug-in socket receiver 1-channel, pulse, white	GB
RCP02E5001B04-01K	Plug-in socket receiver 1-channel, pulse, white	F/B/PL
RCP02E5001B05-01K	Plug-in socket receiver 1-channel, pulse, white	CH