

## RTS39 Flush-mounted transmitter

Up to two 230 V buttons or two 230 V switches can be connected to the RTS39 stationary transmitter.

In this way, any standard 230 V button or switch can control an Easywave radio receiver using a radio signal, without need for complicated wiring.




RTS39E5002B01-23K

TRANSM.


### Technical specifications

Coding	factory coding with Easywave telegram
Frequency	868.30 MHz
Channels	2
Range	typically 150 m in good free-field conditions
Power supply	230 V AC, 50 Hz
Power consumption	maximum 0.43 W
Operation	via connected button/switch
Function	depends on the receiver (see models)
Operating temperature	-20 °C to +60 °C
Dimensions	48 x 48 x 25 mm
Weight	32 g


### Wiring diagram

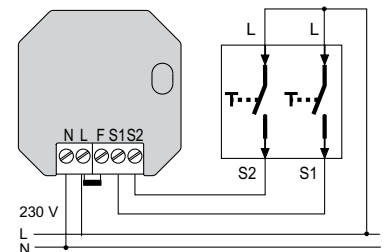

Switch connection  
S1, S2: ON/OFF

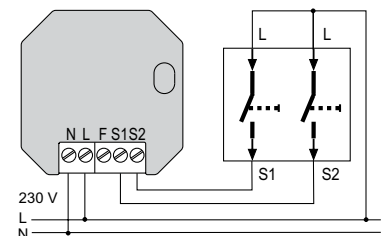

Button connection  
S1, S2: ON/OFF

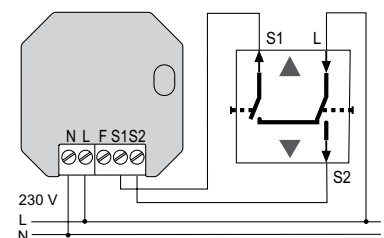

Motor control button connection  
S1: UP, S2: DOWN

### Scope of delivery

- Flush-mounted transmitter
- Operating manual

### Models

Product numbers	Description	Function
RTS39E5002B01-23K	Flush-mounted transmitter 2-channel	2x ON/OFF (switch) 2x ON/OFF (button) 2x PULSE (button)