

RCD22 Radio control serial interface



The RCD22 transmits and receives Easywave telegrams. It is controlled via an RS232 interface in HEX format. The control and evaluation software has to be created by the user.

Where environmental conditions are unfavorable, the external antenna ACC-ANT50-03-21P can be connected to improve wireless reception. This is not included with the product, but can be ordered separately.




RCD22E5001A02

Technical specifications

Coding	Easywave
Frequency	868.30 MHz
Channels	1
Power supply	230 V AC, 50 Hz
Power consumption	1,5 W standby
Output	RS232 interface
Protection degree	IP66 (when delivered)
Operating temperature	-20 °C to +60 °C
Dimensions (W/L/H)	130/94/57 mm

Wiring diagram

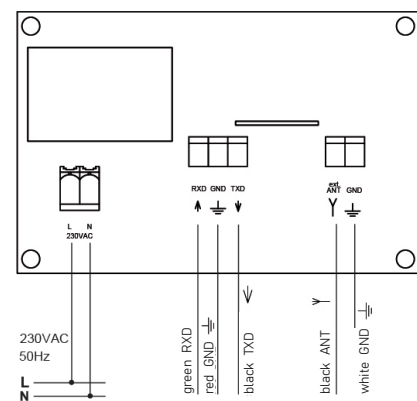

Scope of delivery

- Radio control
- Mounting material
- Operating manual

Accessories (optional)

ACC-ANT50-03-21P external antenna, 868MHz, 5m coaxial cable, clamp connection, magnetic base



Models

Product number	Description
RCD22E5001A02	Radio control, Easywave, 230V, RS232 interface