

RCL07 Mini receiver

12-24 V DC 2-channel



The RCL07 mini receiver is a radio micro-receiver equipped with two potential-free switch contacts and designed for a variety of different applications.

The mini receiver is suitable for converting existing radio systems or for upgrading wired switchgear.





RCL07E5002A21-02K

Technical specifications

Coding	Easywave Up to 32 transmitters can be programmed.
Frequency	868.30 MHz
Channels	2
Power supply	12-24 V DC
Power consumption	12 V DC: 19 mA standby 65 mA load (both relays are switched) 24 V DC: 11 mA standby 31 mA load (both relays are switched)
Operating modes	DEAD MAN ON/OFF (2-button operation) PULSE (1 second)
Outputs	2 potential-free relay contacts (1x changeover, 1x normally open) combined
Maximum contact load	DC: 30 V / 1 A / 30 W
Protection degree	IP54 (with installed \varnothing 5,30mm cable)
Operating temperature	-20 °C to +60 °C
Dimensions (W/L/H)	35/80/20 mm
Color	white similar RAL 9003

Wiring diagram

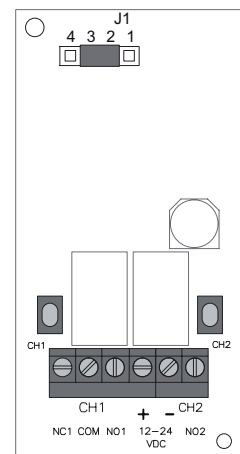

Scope of delivery

- Mini receiver
- Operating manual

Models

Product number	Description
RCL07E5002A21-02K	Mini receiver, Easywave, 12-24VDC, 1x changeover + 1x normally open, potential-free, IP54, white