

RCL09 Mini receiver

12-24 V AC/DC 2-channel IP65

The wireless controller RCL09 has two potential-free relay contacts which can be activated by ELDAT secwave transmitters.

The RCL09 is operated at 12-24 V AC/DC, and up to 100 secwave transmitters per channel can be paired.

With regard to technical features, the RCL09 is identical to the RCL08, but the housing is dustproof and waterproof.




RCL09S5002A01-01K

Technical specifications

Coding	secwave AES 128-bit encryption Up to 100 transmitters per channel can be programmed. Not compatible with Easywave products!
Frequency	868.30 MHz
Channels	2
Power supply	12-24 V AC/DC
Power consumption	0.4 W standby at 24 VDC 0.8 W standby at 24 VAC
Operating modes	ON/OFF (1-button operation) PULSE (1 second)
Outputs	2 potential-free relay contacts (changeover)
Maximum contact load	
- AC	24 V / 1 A / 24 VA
- DC	30 V / 1 A / 30 W
Operating temperature	-20 °C to +60 °C
Dimensions (W/L/H)	72/114/36 mm
Color	white similar RAL 9003

Wiring diagram

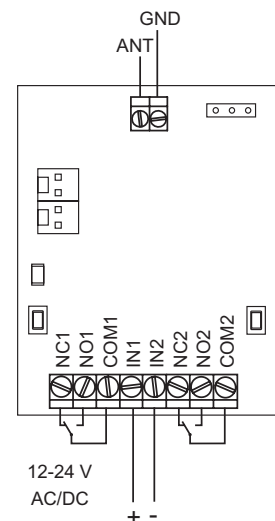

Scope of delivery

- Mini receiver
- Mounting kit
- Operating manual

Accessories (optional)

RCL03-ACC-01-00P	2x cable assembly length 45 cm
ACC-ANT50-03-21P	external antenna 868.30 MHz cable length 5 m



Models

Product number	Description
RCL09S5002A01-01K	Mini receiver, secwave, 12-24V, 2x changeover, potential-free, IP65, white